


MICROPLEAT™ DISPOSABLE DUCTED CEILING MODULES

Request Date: _____	Estimate No. : _____
Requested By: _____	List Price: _____ (Valid for 30 days)
Customer Name: _____	Lead Time: _____ (From receipt of order)
Quantity: _____	

Construction: Anodized Aluminum

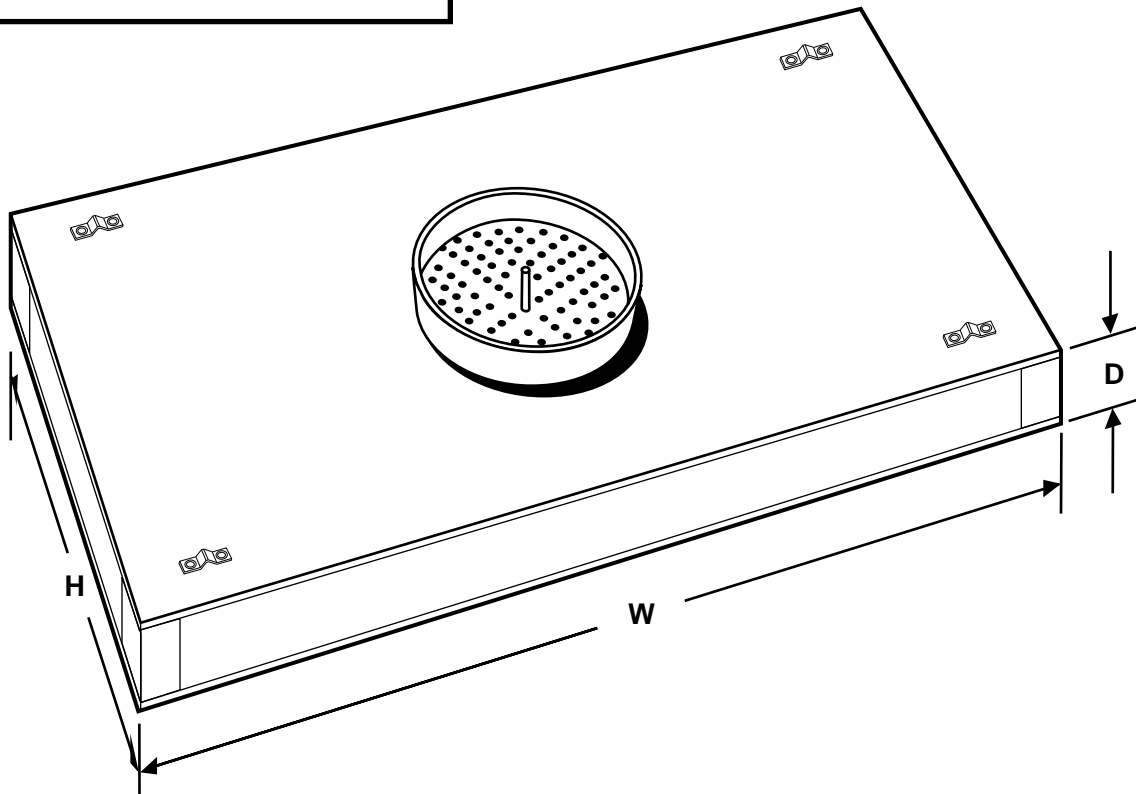

<p>Size:</p> <p><input type="checkbox"/> 24 x 24 (Nominal)</p> <p><input type="checkbox"/> 24 x 48 (Nominal)</p> <p><input type="checkbox"/> Other _____</p>	<p>Inlet Collar Diameter:</p> <p><input type="checkbox"/> 10" Inlet Collar</p> <p><input type="checkbox"/> 12" Inlet Collar</p> <p><input type="checkbox"/> Other _____</p>
<p>Efficiency:</p> <p><input type="checkbox"/> 99.99% on 0.3 microns</p> <p><input type="checkbox"/> 99.999% on 0.3 microns</p> <p><input type="checkbox"/> 99.9995% on 0.12 microns</p> <p><input type="checkbox"/> Other _____</p>	<p>Faceguards:</p> <p><input type="checkbox"/> Expanded Aluminum</p> <p><input type="checkbox"/> White Coated Expanded Metal</p>

AIRGUARD


P.O. BOX 32578, LOUISVILLE, KENTUCKY 40232-2578
(502) 969-2304 FAX (502) 961-0930

MICROPLEAT™

DISPOSABLE DUCTED CEILING MODULES

Construction code

1
2
3
4
5
6
7
8
9
10
11
12
13
14

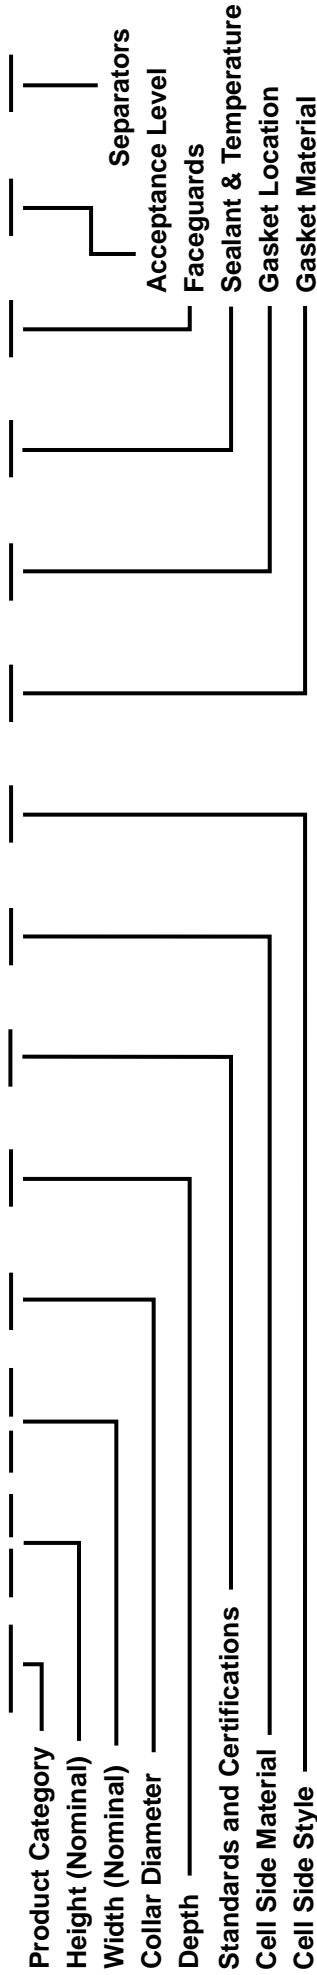

Product Category _____
 Height (Nominal) _____
 Width (Nominal) _____
 Collar Diameter _____
 Depth _____
 Standards and Certifications _____
 Cell Side Material _____
 Cell Side Style _____

- | | | | |
|---|--|--|--|
| <p>1 - Product Category
 CD - Ceiling Diffuser - Disposable
 (Includes top cover plate with inlet collar, adjustable damper, four hangers on upstream side)</p> <p>2 - Height
 24 - Nominal 24" (Actual 23-5/8")
 (Other sizes available on request)</p> <p>3 - Width
 24 - Nominal 24" (Actual 23-5/8")
 48 - Nominal 48" (Actual 47-5/8")
 (Other sizes available on request)</p> <p>4 - Collar Diameter
 0 - Standard (10")
 2 - 12"
 (Other sizes available on request)</p> | <p>5 - Depth
 L - Low Profile
 (5-7/8" with 2" collar extension)</p> <p>6 - Standards and Certifications
 0 - Standard (U.L. Class 2)
 (Filters comply with efficiency testing specifications of IEST-RP-CC001.3 per MIL Std. 282)
 Y - Special</p> <p>7 - Cell Side Material
 N - Anodized Extruded Aluminum</p> <p>8 - Cell Side Style
 M - Center Post with 3 Test Ports
 N - Center Post with 2 Test Ports
 P - Center Post with 1 Test Port</p> <p>9 - Gasket Material
 1 - SCE 43 Neoprene Gasket, 1/4" x 3/4"
 7 - No Gasket
 G - Knife Edge</p> | <p>10 - Gasket Location
 0 - Standard (Downstream)
 2 - Downstream
 5 - No Gasket</p> <p>11 - Sealant & Temperature
 0 - Standard (Fire Retardant Polyurethane)
 See #14 Separators for operating temperature limit</p> <p>12 - Faceguards
 1 - Expanded Aluminum (Downstream)
 P - Perforated Stainless Steel (Downstream)
 W - White Coated Expanded Metal (Downstream)</p> | <p>13 - Acceptance Level
 0 - 99.97% on .3 microns
 2 - 99.99% on .3 microns
 3 - Scanned (99.99% on .3 microns)
 4 - Scanned (99.999% on .3 microns)
 5 - 99.99 on .3 microns. Also Scanned (IEST Type C)
 6 - 99.999% on .3 microns. Also Scanned (IEST Type D)
 B - 99.97% on .3 microns using PSL
 C - 99.99% on .3 microns using PSL
 E - 99.999% on .12 microns using PSL
 F - 99.9995% on .12 microns using PSL
 G - 99.999% on .10 - .20 microns using PSL.
 Also Scanned (IEST Type F)</p> <p>14 - Separators
 6 - 2" Pack, Mini-Pleat Bead Separators (160°F)
 Y - Special</p> |
|---|--|--|--|