




# Microguard<sup>®</sup> 99 HEPA and ULPA Filters

99.97%, 99.99%, 99.999%  
on .3 micron particles

- Standard Capacity and High Capacity
- Gasket Seal and Gel Seal
- High Temperature Models
- U.L. Class 1, Class 2, 586

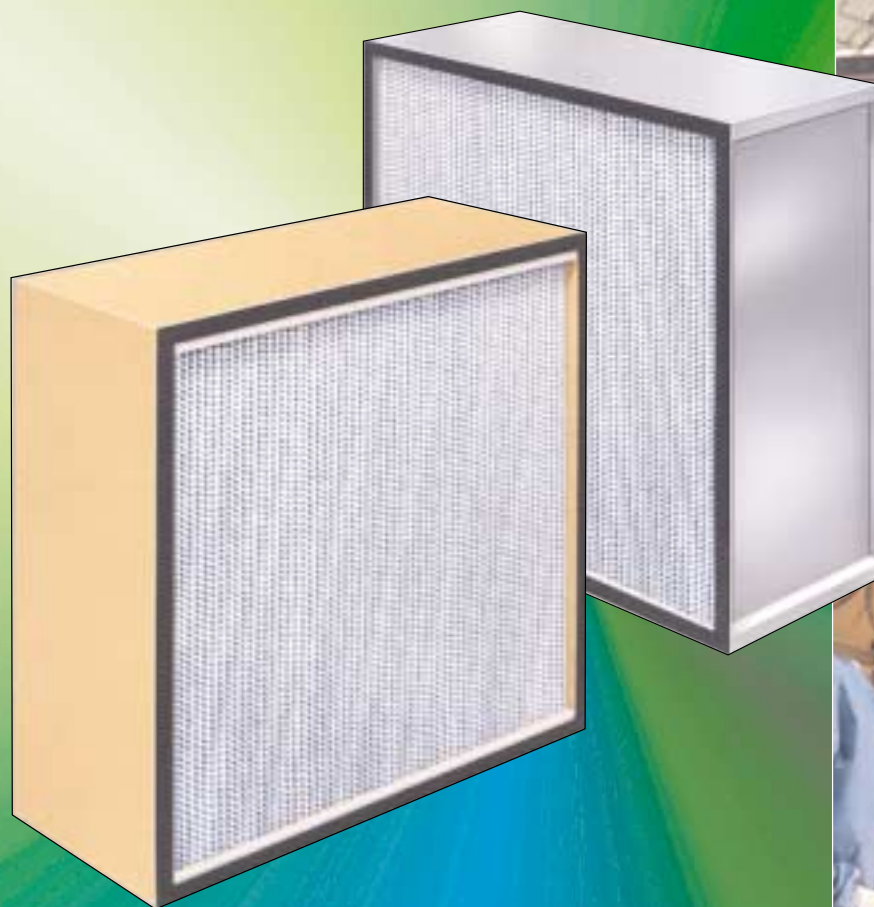

*Product Research and Testing*




*Hospitals and  
Operating Rooms*



*Pharmaceutical Manufacturing*



UL CERTIFICATES  
A4915 A6920

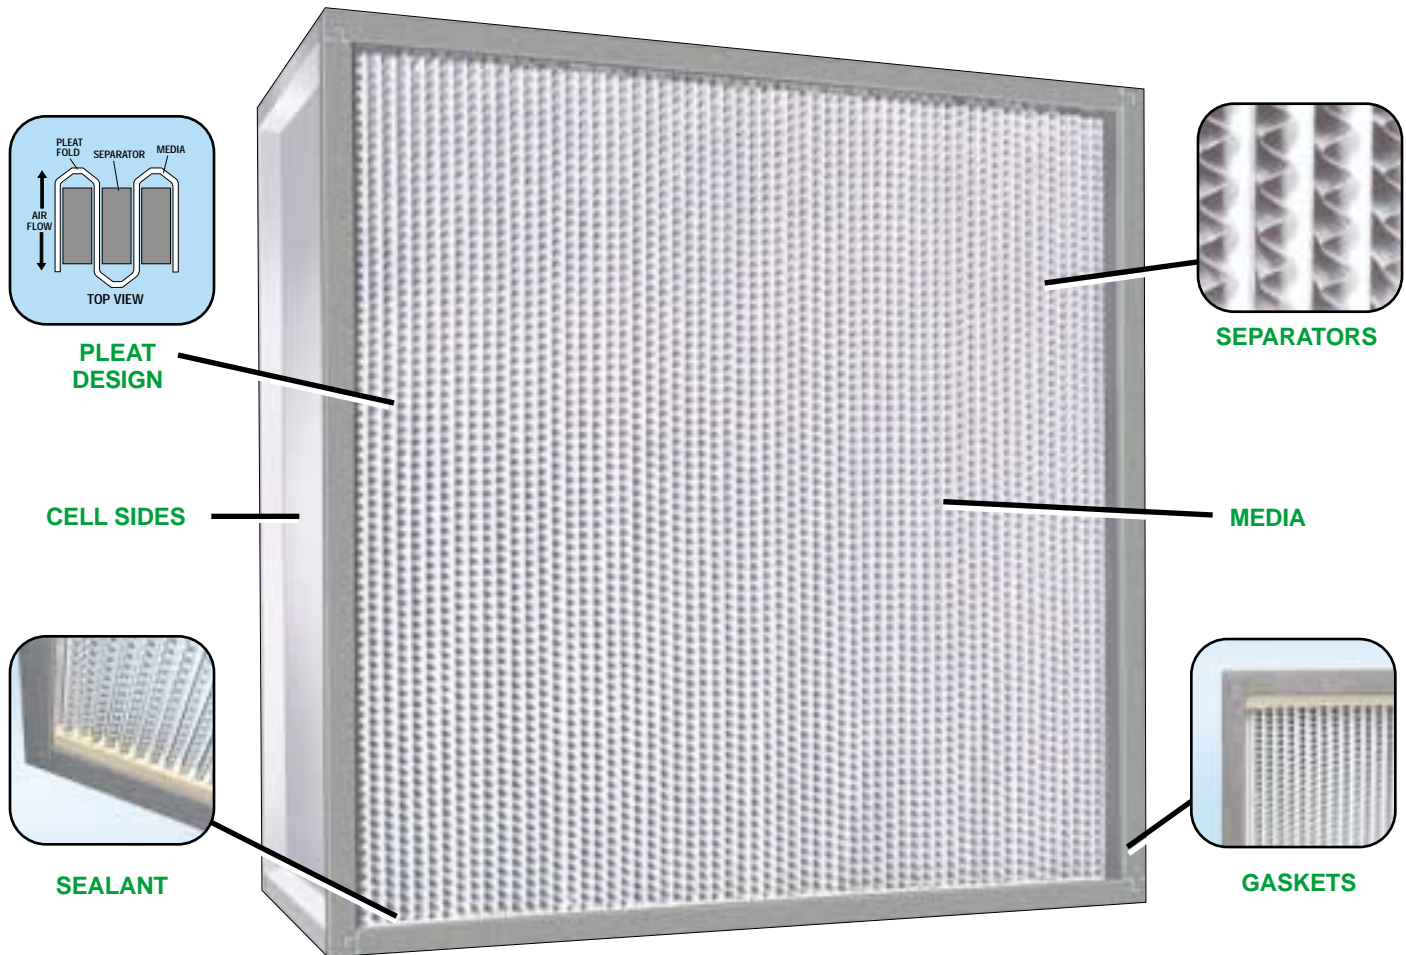

**CELL SIDES:** Choose from Particle Board, Fire Retardant Particle Board, Fire Retardant Plywood, Galvanized Steel, Aluminized Steel, Stainless Steel or Aluminum.

**MEDIA:** Wet laid paper produced from glass microfibers, Microguard 99 media is waterproof and heat resistant up to 1000 °F. The continuous media sheet is subject to eleven distinct tests and inspections prior to shipment.

**PLEAT DESIGN:** Microguard 99 filters utilize a unique score fold design developed by Airguard Industries. This channel design increases media surface area and reduces opportunities for media damage during handling and installation.

**FACEGUARDS:** Expanded metal or stainless steel hardware cloth can be furnished on one or both sides of the filter.


**SEPARATORS:** Utilizing Airguard's hemmed safety edge, corrugated aluminum separators allow for maximum media utilization. The design minimizes risk of media puncture, adds overall filter pack rigidity and stability, and offers maximum air flow through the filter. Separator materials offered include aluminum, vinyl coated aluminum, and kraft paper.

**SEALANT/BOND:** The entire media pack is bonded to the interior of the cell sides with urethane sealant. Silicone and ceramic bonds are also available.

**GASKETS:** Dove tail interlocking neoprene rubber gaskets are standard on Microguard 99. Gaskets are 3/4" x 1/4" and are furnished as standard on the air leaving ( downstream ) side of the filter. Alternative gaskets include silicone and ceramic. Gel seal filters are also available.

# Performance and Operating Data

## Air Flow Capacity vs. Initial Resistance

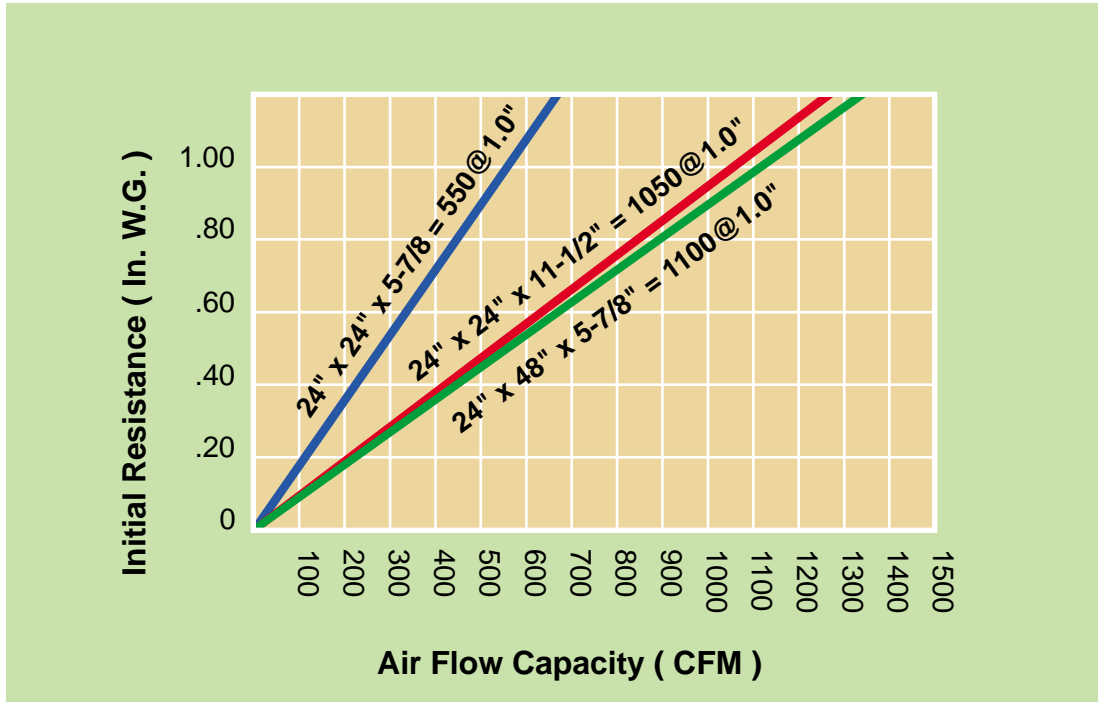

## Standard Microguard 99 Sizes

Actual Filter Size (inches) H x W x D	Air Flow Capacity (CFM) @1.0"W.G.	Actual Filter Size (inches) H x W x D	Air Flow Capacity (CFM) @1.0"W.G.	Actual Filter Size (inches) H x W x D	Air Flow Capacity (CFM) @1.0"W.G.
12 x 12 x 11-1/2	260	8 x 8 x 5-7/8	55	30 x 24 x 5-7/8	685
12 x 24 x 11-1/2	525	12 x 12 x 5-7/8	140	30 x 30 x 5-7/8	860
15-3/8 x 19-3/8 x 11-1/2	545	12 x 24 x 5-7/8	275	30 x 36 x 5-7/8	1030
20-7/8 x 20-7/8 x 11-1/2	795	20-7/8 x 44-7/8 x 5-7/8	895	30 x 48 x 5-7/8	1370
23-3/8 x 23-3/8 x 11-1/2	1000	23-1/4 x 47-1/4 x 5-7/8	1050	30 x 60 x 5-7/8	1715
24 x 12 x 11-1/2	525	23-3/8 x 23-3/8 x 5-7/8	520	30 x 72 x 5-7/8	2055
24 x 24 x 11-1/2	1050	24 x 24 x 5-7/8	550	36 x 24 x 5-7/8	825
24 x 30 x 11-1/2	1315	24 x 30 x 5-7/8	685	36 x 30 x 5-7/8	1030
		24 x 36 x 5-7/8	825	36 x 36 x 5-7/8	1235
		24 x 48 x 5-7/8	1100	36 x 48 x 5-7/8	1645
		24 x 60 x 5-7/8	1370	36 x 60 x 5-7/8	2055
		24 x 72 x 5-7/8	1645	36 x 72 x 5-7/8	2470

1. All dimensions shown are actual filter sizes (not including gaskets). Filters have a manufacturing tolerance of +0 -1/8" to insure proper fit.
2. All filters are listed with the height (H) dimension shown first. It is important to install the filters with the pleats in the vertical position only.
3. Test ports are available on many models.
4. Center dividers, with or without test ports, available on many models.
5. Underwriters Laboratories Classifications: Microguard 99 filters are available with U.L. Class 1, U.L. Class 2 or U.L. 586 classifications.

# Microguard 2000

## High Capacity HEPA Filters



### 500 FPM Operation

Microguard 2000 High Capacity HEPA filters are designed for use in higher air flow applications up to 500 FPM. They offer a wide range of operating and cost advantages including:

- Higher air flow with no increase in resistance.
- Higher air flow while providing HEPA efficiency.
- Lower resistance, lower energy cost, longer life at standard air flow rates. Microguard 2000 filters have only .60" W.G. resistance at 1000 CFM.
- Longer service life reduces disposal costs, less contribution to landfills.
- Reduces space required for filter bank.
- Eliminates transitions.

High capacity operation is achieved by designing additional media into the filters – 50% more than standard capacity HEPAs. Decreased height of the corrugated separators enables the filter to contain more pleats, more media.

### New Installations

If designing a new system, Microguard 2000 filters can reduce the space required for HEPA filters by installing one half the quantity normally specified. Delivery of 2000 CFM at only 1.35" W.G. or 1500 CFM at 1.0" W.G. offers a wide range of space saving opportunities.

### Renovations

If renovating an existing system, selection of high capacity filters means longer service life, lower resistance, lower energy cost, lower maintenance expenses and less disposal cost, if existing air flow rates are maintained.

Microguard 2000 filters are directly interchangeable with standard HEPA filters.

### Choose from Three Efficiencies

- 99.97% on 0.3 microns - IEST Type A
- 99.99% on 0.3 microns - IEST Type C available
- 99.999% on 0.3 microns - IEST Type E available

## MICROGUARD 2000 HIGH CAPACITY FILTERS OPERATING DATA

Microguard 2000 High Capacity MODEL NUMBER	FILTER DIMENSIONS H x W x D (Inches)	99.97%			99.99%			99.999%		
		CAPACITY (CFM) @ Initial Pressure Drop			CAPACITY (CFM) @ Initial Pressure Drop			CAPACITY (CFM) @ Initial Pressure Drop		
		.60"	1.0"	1.35"	.60"	1.0"	1.35"	.60"	1.0"	1.35"
MC2000-501	24 x 24 x 11-1/2	1000	1500	2000	1000	1500	2000	760	1170	1560
MC2000-501A	23-3/8 x 23-3/8 x 11-1/2	930	1400	1870	930	1400	1870	720	1100	1460
MC2000-500	12 x 24 x 11-1/2	500	750	1000	500	750	1000	300	575	780
MC2000-500A	11-3/8 x 23-3/8 x 11-1/2	450	690	920	450	690	920	350	540	715



**AIRGUARD**  
P.O. BOX 32578, LOUISVILLE, KENTUCKY 40232-2578  
(502) 969-2304 FAX (502) 961-0930

Visit our Web Site - [www.airguard.com](http://www.airguard.com)  
E-Mail Address - [mailbag@airguard.com](mailto:mailbag@airguard.com)

Distributed by: